

ITEM NO:	
PROJECT:	
DATE:	

**Combination Non-Refrigerated Service Above Refrigerated Self-Service Case** 

□ COU2757R

Lengths include end panels 28"L x 34-1/2"D x 56-7/8"H



## STANDARD FEATURES

- Breeze™ w/EnergyWise s/c refrigeration
- Angled deck (n/a w/display steps)
- Casters
- Clear glass shelf, lighted
- Compressor air intake from rear and out front panel at toe kick. Front panel cannot be blocked.
- Condensate pan (self-contained refrig. only)
- Curved single pane, fixed front glass
- Full end panel w/mirror interior
- Integrated average product temperature of 40°F or less
- One year parts & labor; 5 year compressor warranty
- T-8 top & shelf lights

	= 1 o top a crion ngrito									
Features	Standard	Options								
EXTERIOR COLOR	□ Laminated (non-premium) Confirm	□ Laminated (premium) Confirm pattern/grain direction								
	pattern/grain direction	□ Stainless steel								
INTERIOR COLOR	□ Black	□ Stainless steel								
UPPER REAR	□ Clear glass rear sliding doors w/o lock									
ELECTRICAL CONNECT	□ 6' straight blade power cord	□ 6' locking power cord (self-cont.)								
	(self-cont.)									
MISCELLANEOUS		□ LED 4200K lights								
		□ Rear door lock								
		□ Second year parts & labor warranty (excludes								
		compressor)								
ACCESSORIES		□ 2"H Display steps								
		□ Night curtain, retractable, non-locking								
		□ Removable wire security cover, locking								

888 E. Porter Rd.


Ph. 231-798-8888 Fx. 231-798-4960



Intend	Intended Environment: Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.							
Zone	Intended Product To Be Displayed	Integrated Prod Temp ° F						
1	Packaged refrigerated products	40						
2	Packaged non-refrigerated products	Ambient						

**PLAN VIEW** 



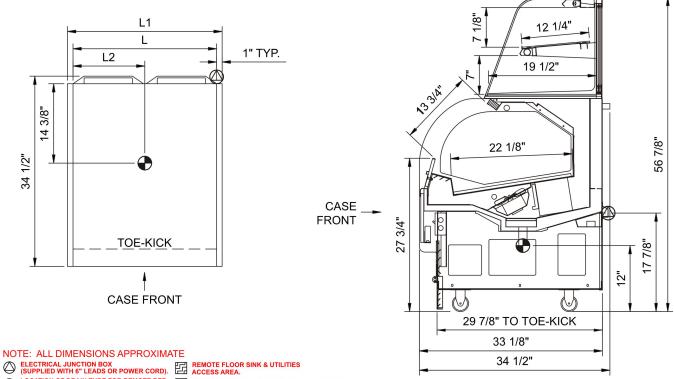

LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4" OR 11/2" PVC TUBE).

SELF-CONTAINED CASE SERVICE ACCESS AREA.

REFRIGERATION LINE CONNECTION.

$\equiv$				
KV3	DRY CASE	SERVICE	ACCESS	AREA.

Model Technical Specifications															
Model	L"	L1"	L2"	System Circuit Volts		Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	втин	Ship Wt	
COU2757R	N/A	28.00	4.75	Self-Contained	Circuit #1	110-120	1	60	5.76	376	2+G	5-15P	N/A	N/A	550

\*\*\* Does not include electric defrost on freezer models.

## Regulatory Approvals:

All Models Accordance with AHRI Std 1200 ETL Listed to UL 471 ETL Listed to CAN/CSA 22.2 No. 120

ETL Sanitation to NSF 7





## **Important Notes:**

- 1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
- 2) 35 1/2" Minimum door entry clearance required (Without shipping skid).
- 3) Compressor air ventilation is out the front panel. Front panel cannot be blocked. Product must be cooled before being displayed within the case.

